



HabasiLINK®

M5182 Roller Top - 90° 2"



Description

- Designed for easy 90° transfer
- Imperial belt width
- Large robust roller with diameter 23 mm (0.9")
- Roller distance 50 mm (2")
- Smart-Fit rod retention
- Rod diameter 7 mm (0.27")
- Closed hinge
- Indent 50 mm (2")
- Lug teeth sprockets

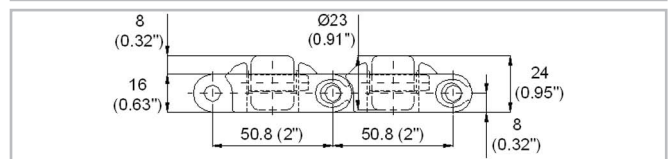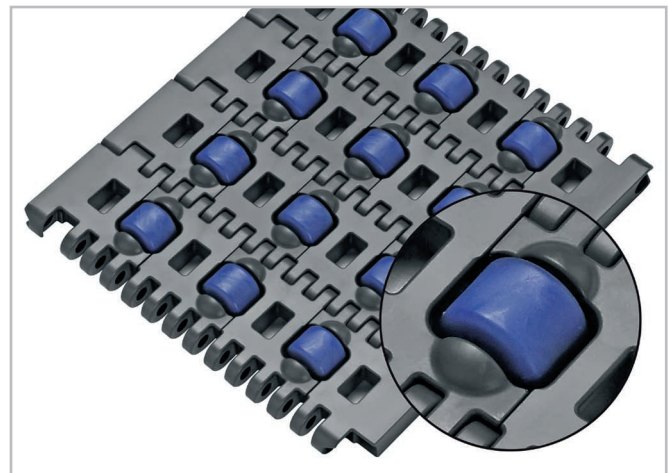

Belt data

Belt material		PP		POM	
Rod material		POM		PA	
Roller material		PA		POM	
Nominal tensile strength F'_N	N/m	20000	20000	40000	40000
straight run	lb/ft	1370	1370	2740	2740
Temperature range	°C	5 - 93	5 - 105	-40 - 93	-40 - 93
	°F	40 - 200	40 - 220	-40 - 200	-40 - 200
Belt weight m_B	kg/m ²	13.5	13.5	18.5	18.5
	lb/sqft	2.76	2.76	3.79	3.79

Diameter of idling rollers (minimum)		Diameter of support rollers (minimum)		Diameter for gravity take-up and center drive rollers (minimum)		Backbending radius for elevators without sideguards or hold down devices (minimum)	
mm	inch	mm	inch	mm	inch	mm	inch
90	3.5	100	4	150	6	150	6

Standard range of belt widths b_0

mm (nom.)	152	203	254	305	356	406	457	508	559	610	660	711	762	etc.
inch (nom.)	6	8	10	12	14	16	18	20	22	24	26	28	30	etc.

Real belt widths are in most cases 0.1% to 0.3% smaller.

Standard belt widths in increments of 2.0" (50.8 mm). Cut width: Standard belt width - 0.5" (- 12.7 mm).

For detailed material properties refer to the HabasiLINK® Engineering Guidelines or contact your Habasi representative.

The nominal tensile strength is valid for 23 °C (73 °F). The admissible tensile force depends on the operating temperature near the drive sprockets. Within the temperature range allowed, the admissible tensile force may vary from 100% to 20% of the nominal tensile strength. For detailed information and correct calculation of effective tensile force refer to the Calculation Guide in the HabasiLINK® Engineering Guidelines.

HabasitLINK®

M5182 Roller Top - 90° 2"



Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications / information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use. New knowledge and experiences can lead to modifications and changes within a short time without prior notice.

BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.